


Type:	LPC 1	LPC 2	LPC 4
DMX 1	≤ 512 channels	≤ 512 channels	≤ 512 channels
DMX 2	Clone to DMX1 *	≤ 512 channels	≤ 512 channels
eDMX	≤ 512 channels	≤ 1,024 channels	≤ 2,048 channels
Total	≤ 512 channels	≤ 1,024 channels	≤ 2,048 channels

* TPC channels can be output via an LPC1's DMX 2 port
Pharos supports free patch, multiple protocols and universes simultaneous. Only the channels count.

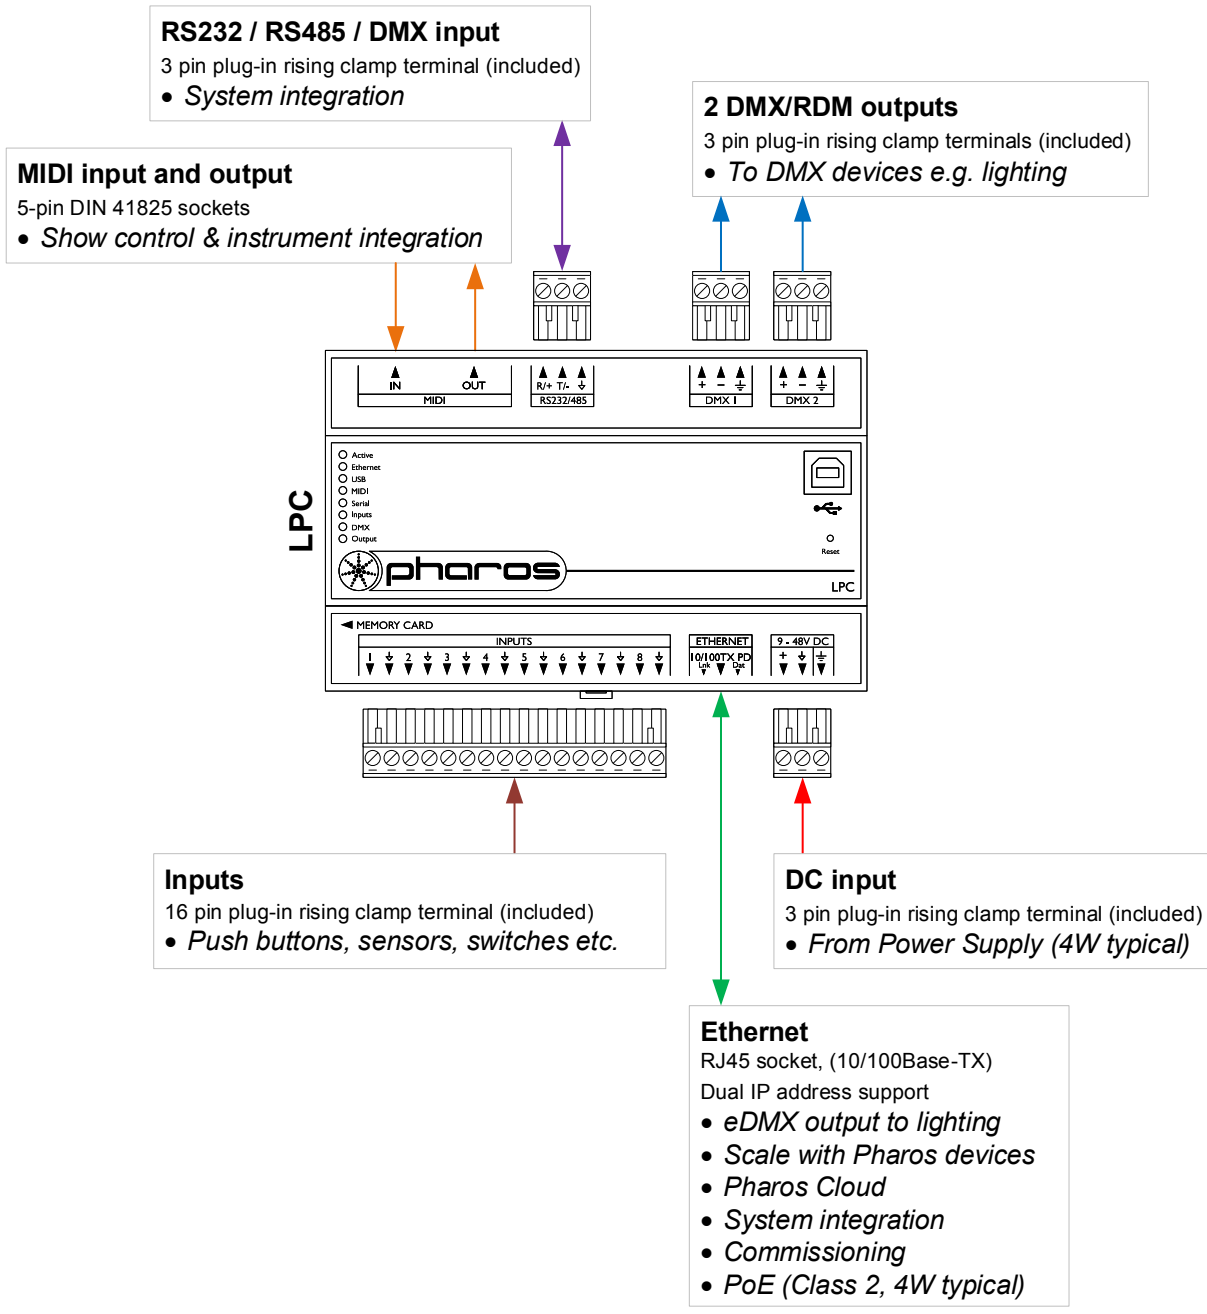


Inputs
16 pin plug-in rising clamp terminal (included)
• Push buttons, sensors, switches etc.

DC input
3 pin plug-in rising clamp terminal (included)
• From Power Supply (4W typical)

Ethernet
RJ45 socket, (10/100Base-TX)
Dual IP address support
• eDMX output to lighting
• Scale with Pharos devices
• Pharos Cloud
• System integration
• Commissioning
• PoE (Class 2, 4W typical)

note: Power via PoE or DC power

- Consult the **Installation Guide** for technical details
- See **General Notes.pdf** for information on cabling types
- Contact your supplier, visit our website or mail support with any other questions

 pharoscontrols.com	Reference: 0001	Name: LPC interfaces		
	Size: A4	Date: 27/09/2016	Rev: V 1.0	Notes: Setup
	Page: 1 of 1	17/09/2018	V 1.1	Minor adjustments
		21/01/2019	V 1.2	Minor adjustments
	27/05/2021	V 1.3	Minor adjustments	