



Type:	TPC
DMX	(via eDMX to DMX nodes or EXT)
eDMX	≤ 512 channels
RIO DMX	≤ 96 channels
Total	≤ 512 channels

Type:	Inputs	Outputs	Serial Port
RIO 80	8	0	Yes
RIO 44	4	4	Yes
RIO 08	0	8	Yes

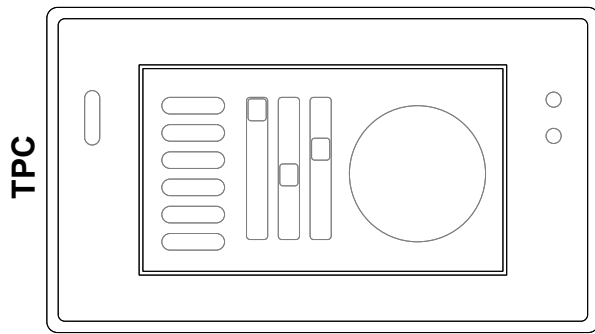

or DMX out (≤ 96 channels) or RS232 or RS485



Outputs



Outputs

eDMX luminaires / eDMX nodes

eDMX / Scaling and integration

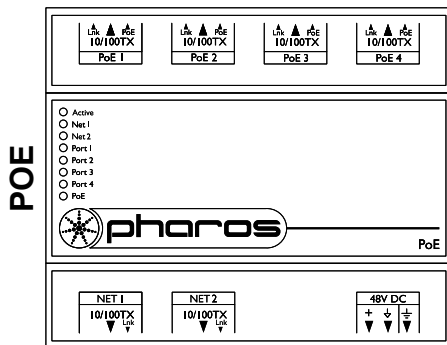

To computer (for commissioning only)
Optional to Pharos Cloud / Integration / Scaling

Mains (100-240V AC)

note: Actual power consumption dependent on PoE port loading

- Consult the **Installation Guide** for technical details
- See **General Notes.pdf** for information on cabling types
- **More configurations** are possible to fulfil any project
- Contact your supplier or visit our website for support



pharoscontrols.com

Reference: 1204

Name: TPC - RIO 08

Size: A4

Date: Rev: Notes:

27/09/2017	V 1.0	Setup
17/09/2018	V 1.1	Minor adjustments
11/01/2019	V 1.2	Minor adjustments
27/05/2021	V 1.3	Minor adjustments